

SVD 152

160 kg Modular Cube



Other models in this range: SVD 222 - SVD 203 - SVD 303 - SVD 503

Technical Features

- High efficiency vertical evaporator cuber
- Stainless Steel finishing
- Built in cleaning system
- Low power and water consumption
- Self diagnostic system with led indicators
- Easy removable condenser filter
- Front evaporator access: immediate access to the evaporating plate for quick self-maintenance operations
- Head only ice maker: requires a separate storage bin to collect the ice produced.

24 Hour Ice Production - 10°/10° C

Air Cooled 160 kg

Water Cooled 140 kg

Compatible Bins

R 100 - RB 100
R 130

Voltage

220/50/1 standard version
220/60/1 version available on demand

Technology and Certifications




Certified ISO 9001



Full Cube - 12 G
(26,5 x 26,5 x 26 mm)



Half Cube - 6 g
(13 x 26,5 x 26 mm)



MILANO OFFICE
Sales Dept.
Tel. +39 02 93900215
e-mail: sales@simag.it
Service Dept.
Tel. +39 02 93960357
e-mail: service@simag.it

SIMAG FAR EAST
Singapore Office
Tel. ++65 6738 5393
e-mail: scotsman@scotsman.com.sg


www.simag.it

SVD 152

160 kg Modular Cube



Other models in this range: SVD 222 - SVD 203 - SVD 303 - SVD 503

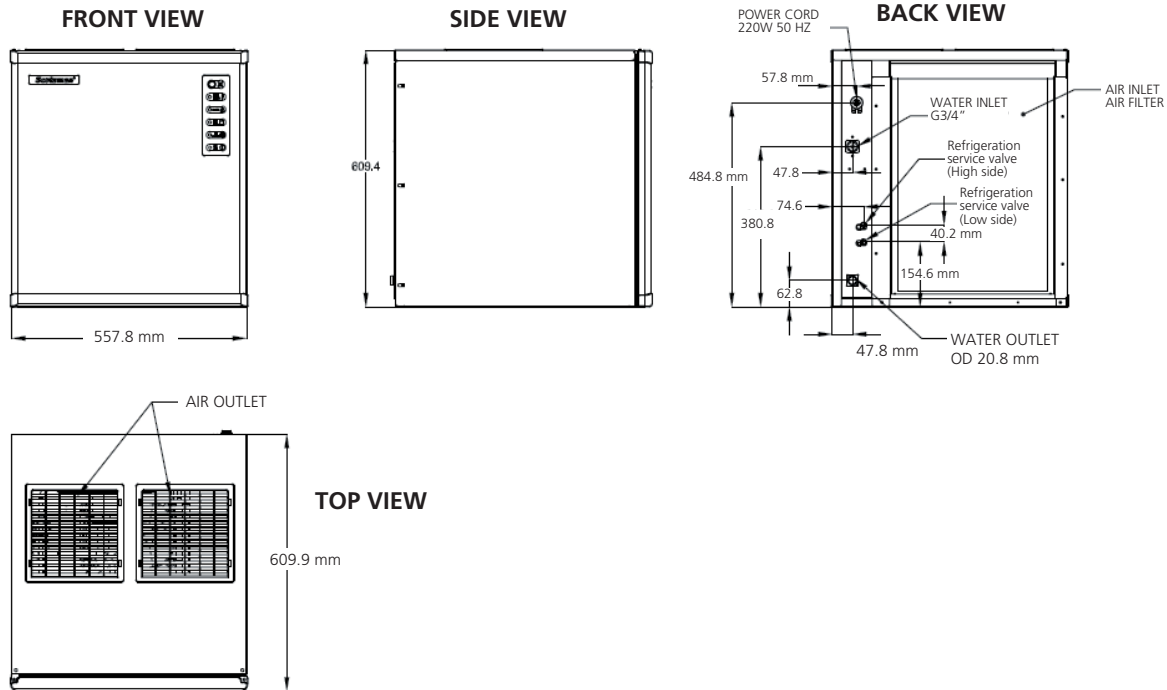

Operating Limits

	Minimum	Maximum
Air Temperatures	10°C	40°C
Water Temperatures	5°C	35°C
Electrical Voltage	-10%	+10%
Water Pressure	14 psi 1 bar	70 psi 5 bar

Specifications and design are subject to change without notice

	Voltage	Power Input Watt (*)	Refrigerant	Fuse Amp	Energy consumption (kwh/100kg)	Water Consumption (l/100kg)	Net Weight kg	Shipping Weight kg
SVD 152 AS	220/50/1	800	R404A	10	15,9	147	55	70
SVD 152 WS	220/50/1	700	R404A	10	11,8	2152	53	67
SVDH 152 AS	220/50/1	800	R404A	10	15,9	147	55	70
SVDH 152 WS	220/50/1	700	R404A	10	11,8	2152	53	67

(*) Power Input: at 43°C Ambient Temperature

(**) Water Consumption: at 32°C Air and 21°C Water